



DETAIL A: COLOR FILTER

CON 1		CON 2	
PIN	SYMBOL	PIN	SYMBOL
1	M	1	VFL1
2	YD	2	NC
3	LP	3	VFL2
4	XCK		
5	DISPOFF		
6	VDD		
7	VSS		
8	VEE		
9	D7		
10	D6		
11	D5		
12	D4		
13	D3		
14	D2		
15	D1		
16	D0		

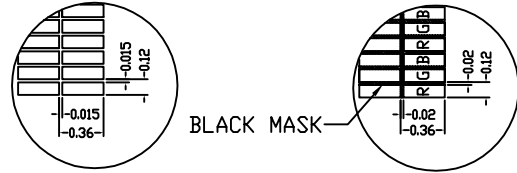

BLACK MASK

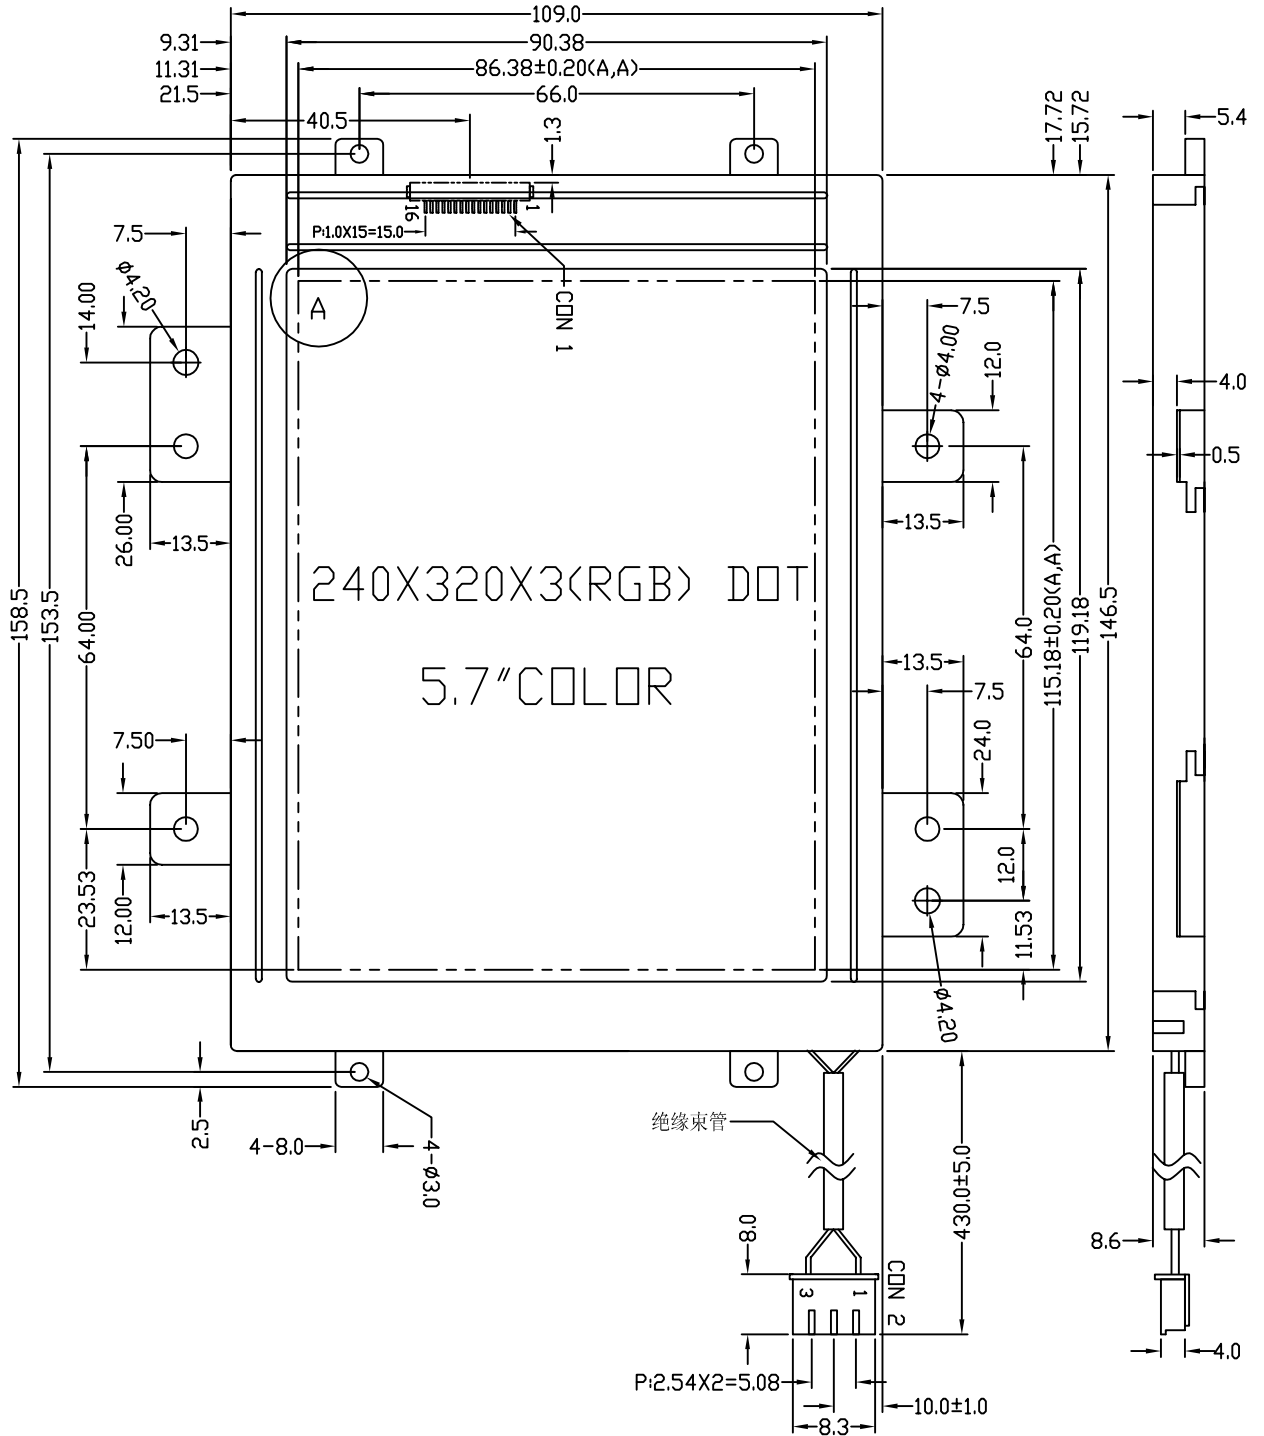

NOTES:

- | | |
|------------------------------|-------------------------|
| 1. DISPLAY TYPE: | COLOR STN |
| 2. VIEWING DIRECTION: | 6:00 |
| 3. POLARIZER MODE: | TRANSMISSIVE/NEGATIVE |
| 4. DRIVE METHOD: | 1/240 DUTY 1/15 BIAS |
| 5. VEE: | 21.6V |
| 6. VDD: | 5.0V |
| 7. OPERATING TEMP: | -25°C~+55°C |
| 8. STORAGE TEMP: | -35°C~+65°C |
| 9. DRIVER: | LH1562F4(OR IST3024TA0) |
| 10. BACKLIGHT: | CCFL(AC:270V WHITE) |
| 11. BEZEL IS STAINLESS STEEL | |
| 12. ALL UNMARKED TOLERANCES: | ±0.3mm |



TIAN-MA MICROELECTRONICS CO.

22/F., HANGDU Building, Shennan Road, Central, Shenzhen, China

DRAWN BY:	TITLE: TM320240AKGWT5	
CHECKED BY:	DWG NO: G-3	
APPROVED BY:	DWG NAME: TM320240AKGWT5-3	SCALE: UNIT: mm
CONFIRMED BY:		SHEET NO: 1 OF 1